


AL100 WALL SHIELD

Fast, Easy Installation Wall Shielding

Great material for RF, EMI shielding at room temperatures. Cover walls, cables, electric panels and more.

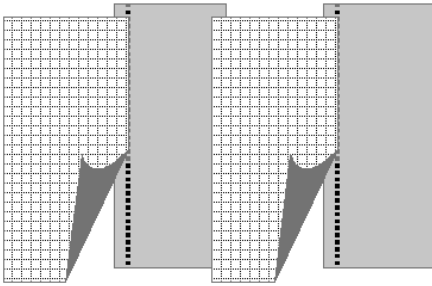


Polyester coated, very lightweight, tough & flexible, yet easy to cut with scissors. 25.5 inch wide, conductive on one side. Apply to walls,

ceilings, and other surfaces to achieve ~100dB at cell phone frequencies, and at least 60 dB from 100 MHz to 18 GHz. Use ordinary spray adhesive on wall, then apply AL100 and press into place. Alternate facing of adjacent panels to achieve conductive-to-conductive

contact with 1 inch overlap. At seams, add 2 sided *conductive* adhesive tape between for a good seal. In addition, this material makes

VERY effective shielded pouches, wallets, and sleeves. Will tolerate 32-122°F. 25.5 inch wide

(Cat. #2272)

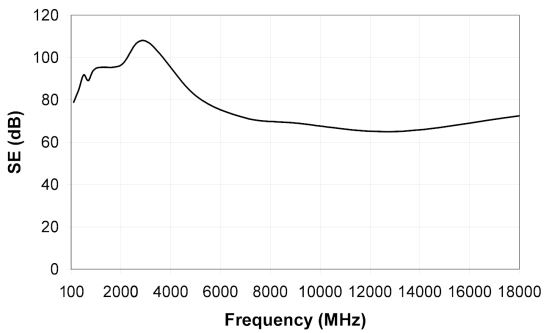

Available from:

Less EMF Inc. "The EMF Safety SuperStore"
809 Madison Ave. Albany, NY 12208 USA

www.lessemf.com